

# Sunmodule®

## SW 340-350 XL MONO



TUV Power controlled:  
Lowest measuring tolerance in industry



Every component is tested to meet  
3 times IEC requirements



Designed to withstand heavy  
accumulations of snow and ice




Sunmodule  
Positive performance tolerance



25-year linear performance warranty  
and 10-year product warranty



Glass with anti-reflective coating

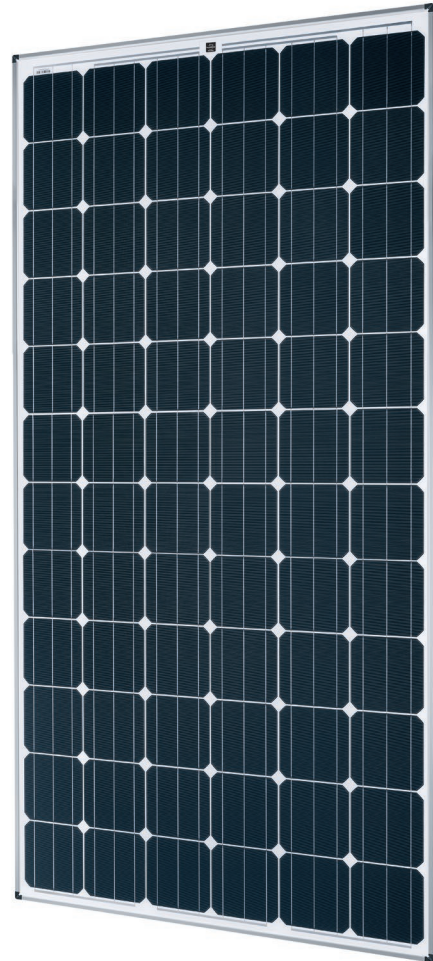

### World-class quality

Fully-automated production lines and seamless monitoring of the process and material ensure the quality that the company sets as its benchmark for its sites worldwide.

### SolarWorld Plus-Sorting

Plus-Sorting guarantees highest system efficiency. SolarWorld only delivers modules that have greater than or equal to the nameplate rated power.

### 25-year linear performance guarantee and extension of product warranty to 10 years

SolarWorld guarantees a maximum performance digression of 0.7% p.a. in the course of 25 years, a significant added value compared to the two-phase warranties common in the industry, along with our industry-first 10-year product warranty.\*

\*in accordance with the applicable SolarWorld Limited Warranty at purchase.  
[www.solarworld.com/warranty](http://www.solarworld.com/warranty)



- Qualified, IEC 61215
- Safety tested, IEC 61730
- Blowing sand resistance, IEC 60068-2-68
- Ammonia resistance, IEC 62716
- Salt mist corrosion, IEC 61701
- Periodic inspection



- Periodic inspection
- Power controlled



# Sunmodule®

## SW 340-350 XL MONO



### PERFORMANCE UNDER STANDARD TEST CONDITIONS (STC)\*



|                             |           | SW 340  | SW 345  | SW 350  |
|-----------------------------|-----------|---------|---------|---------|
| Maximum power               | $P_{max}$ | 340 Wp  | 345 Wp  | 350 Wp  |
| Open circuit voltage        | $V_{oc}$  | 47.6 V  | 47.8 V  | 48.0 V  |
| Maximum power point voltage | $V_{mpp}$ | 38.0 V  | 38.2 V  | 38.4 V  |
| Short circuit current       | $I_{sc}$  | 9.69 A  | 9.75 A  | 9.82 A  |
| Maximum power point current | $I_{mpp}$ | 9.01 A  | 9.10 A  | 9.17 A  |
| Module efficiency           | $\eta_m$  | 17.04 % | 17.29 % | 17.54 % |

\*STC: 1000W/m<sup>2</sup>, 25°C, AM 1.5

### PERFORMANCE AT 800 W/M<sup>2</sup>, NOCT, AM 1.5

|                             |           | SW 340   | SW 345   | SW 350   |
|-----------------------------|-----------|----------|----------|----------|
| Maximum power               | $P_{max}$ | 259.3 Wp | 263.8 Wp | 267.2 Wp |
| Open circuit voltage        | $V_{oc}$  | 41.5 V   | 41.8 V   | 42.0 V   |
| Maximum power point voltage | $V_{mpp}$ | 34.9 V   | 35.2 V   | 35.4 V   |
| Short circuit current       | $I_{sc}$  | 8.05 A   | 8.10 A   | 8.16 A   |
| Maximum power point current | $I_{mpp}$ | 7.42 A   | 7.50 A   | 7.56 A   |

Minor reduction in efficiency under partial load conditions at 25° C: at 200 W/m<sup>2</sup>, 100% of the STC efficiency (1000 W/m<sup>2</sup>) is achieved.

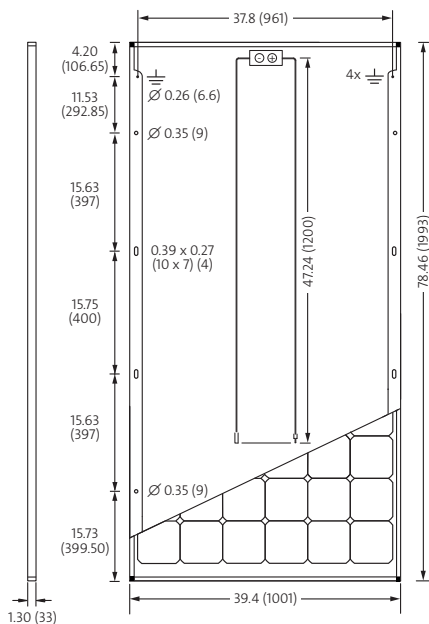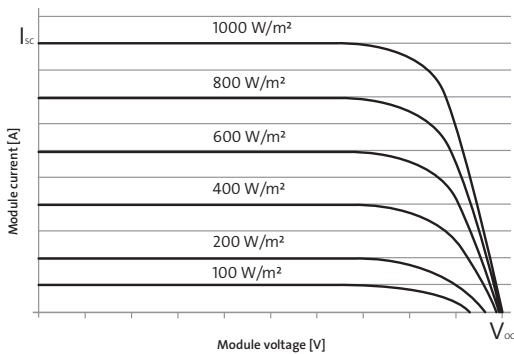

All units provided are imperial. SI units provided in parentheses.  
SolarWorld AG reserves the right to make specification changes without notice.

### COMPONENT MATERIALS

|                  |  |        |   |
|------------------|--|--------|---|
| Cells per module | 72                                     | Front  | Low-iron tempered glass with ARC (EN 12150) |
| Cell type        | Monocrystalline                        | Frame  | Clear anodized aluminum                     |
| Cell dimensions  | 6.17 in x 6.17 in (156.75 x 156.75 mm) | Weight | 47.6 lbs (21.6 kg)                          |

### THERMAL CHARACTERISTICS

|                |               |
|----------------|---------------|
| NOCT           | 46 °C         |
| $TCI_{sc}$     | 0.042 % / °C  |
| $TCV_{oc}$     | -0.304 % / °C |
| $TCP_{mpp}$    | -0.43 % / °C  |
| Operating temp | -40 to +85 °C |


### ADDITIONAL DATA

|                         |   |
|-------------------------|---|
| Power sorting           | -0 Wp/+5 Wp                               |
| J-Box                   | IP65                                      |
| Connector               | PV wire per UL4703 with H4/UTX connectors |
| Module fire performance | (UL 1703) Type 1                          |

### PARAMETERS FOR OPTIMAL SYSTEM INTEGRATION

|                                    |                 |                                 |
|------------------------------------|-----------------|---------------------------------|
| Maximum system voltage SC II / NEC | 1000 V          |                                 |
| Maximum reverse current            | 25 A            |                                 |
| Number of bypass diodes            | 3               |                                 |
| Design loads*                      | Two rail system | 113 psf downward, 64 psf upward |
| Design loads*                      | Edge mounting   | 178 psf downward, 23 psf upward |

\* Please refer to the Sunmodule installation instructions for the details associated with these load cases.

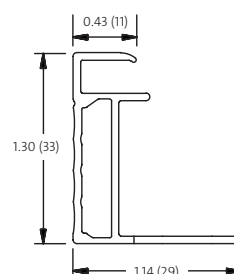

- Compatible with both "Top-Down" and "Bottom" mounting methods
- ⚡ Grounding Locations:
  - 4 locations along the length of the module in the extended flange.

SW-01-7540US-I 160324